



UNZER PAY LATER SOLUTIONS PLATFORM DOCUMENTATION

INTEGRATION WITH MULTI-FACTOR AUTHENTICATION

Version 1.1

Release History

Release	Description	Date	Changes
1.0.0	Initial Version	22-May-2026	-
1.1.0	Small corrections	17-Jul-2026	URLs

PREFACE

Unzer Pay Later Platform Documentation – MFA Integration Description

Copyright © 2026 payolution GmbH - All rights reserved.

Printed in Austria / European Union

The information contained in this document is intended only for the person or entity to which it is addressed and contains confidential and/or privileged material. Any review, retransmission, dissemination or other use of, or taking of any action in reliance upon, this information by persons or entities other than the intended recipient is prohibited. If you received this in error, please contact payolution GmbH and delete the material from any computer.


CONTENT

PREFACE	2
OVERVIEW	4
ENDPOINTS.....	5
STATUS CODES OF THE QUERY RESPONSE	8
AUTHENTICATION TIMEOUT.....	8

OVERVIEW

This document describes the necessary changes to use Unzer Pay Later Multi-factor Authentication (MFA) via the payolution interface.

The following diagram shows how MFA can be used via payolution integration for both the XML and the POST interfaces:

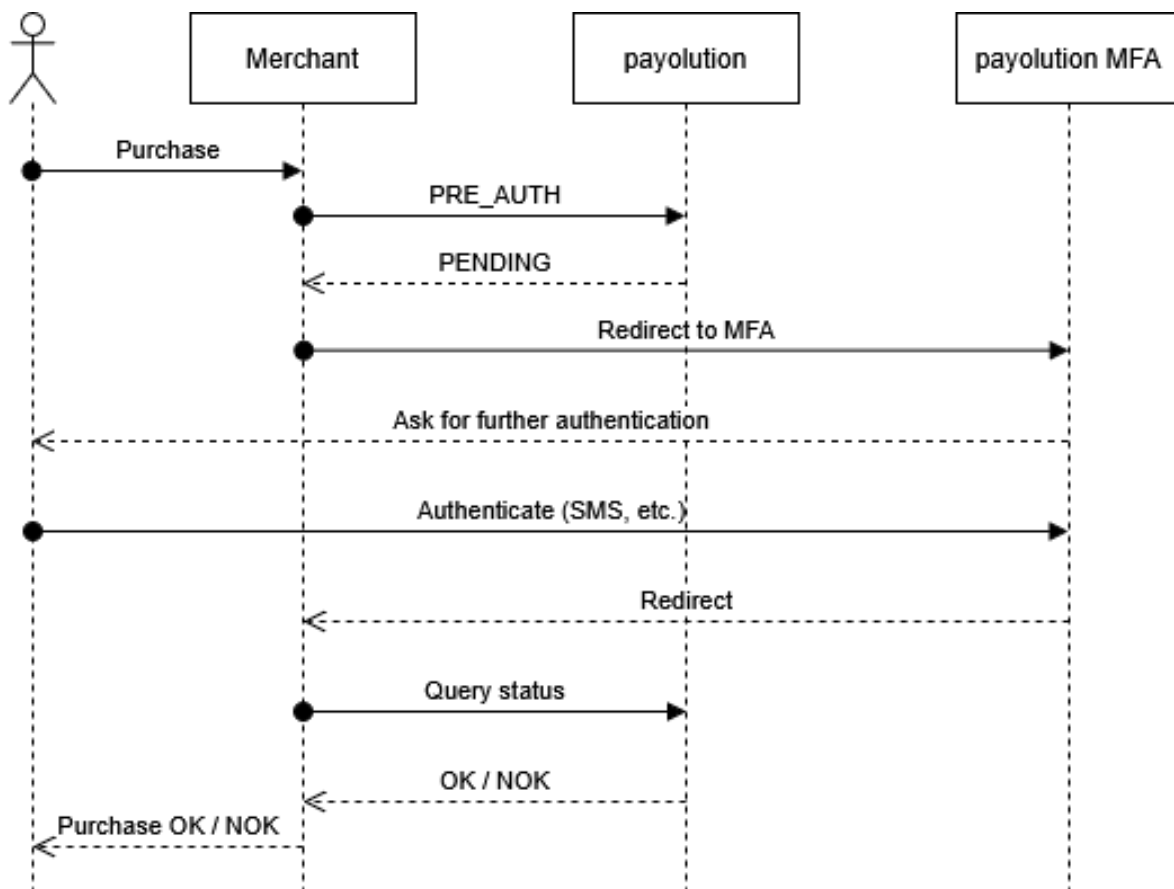

These are the necessary changes in detail for the XML and POST integration:

ENDPOINTS

These are the endpoints to use:

- XML interface:
 - <https://test-gateway.payolution.com/ctpe/api> (test)
 - <https://gateway.payolution.com/ctpe/api> (production)
- POST interface:
 - <https://test-gateway.payolution.com/ctpe/post> (test)
 - <https://gateway.payolution.com/ctpe/post> (production)
- Query interface
 - <https://test-gateway.payolution.com/ctpe/query> (test)
 - <https://gateway.payolution.com/ctpe/query> (production)

PREAUTH REQUEST

When calling the payolution endpoints (specified below), the response URL must be provided to specify where the Customer should be redirected to after MFA completion:

XML	POST
<pre><Request version="1.0"> <Transaction> <Frontend> <ResponseUrl>https://myshop.de/response.php</ResponseUrl> </Frontend> </Transaction> </Request></pre>	<pre>FRONTEND.RESPONSE_URL</pre>

See also the file “XML and POST examples/Invoice/Invoice Examples
XML/2.1_PREAUTHORIZATION_MFA_REQUEST.xml”

PREAUTH RESPONSE

If the PREAUTH response has the state PENDING (see for example “XML and POST examples/Invoice/Invoice Examples XML/2.1_PREAUTHORIZATION_MFA_RESPONSE.xml”) then the value of the field /Response/Transaction/Processing/Redirect/@url or PROCESSING. REDIRECT_URL must be used to redirect the customer to that URL:

XML	POST
<pre> <Response version="1.0"> <Transaction> <Processing code="VA.PA.80.00"> <Timestamp>2017-10-31 15:20:29</Timestamp> <Result>ACK</Result> <Status code="80">WAITING</Status> <Reason code="00">Transaction Pending</Reason> <Return code="000.200.000">Transaction pending</Return> <Redirect url="http://paylater-mfa.test.unzer.io/..."> </Processing> </Transaction> </Request> </pre>	<pre> PROCESSING. REDIRECT_URL </pre>

After the MFA completion, the customer will be redirected automatically to the ResponseUrl provided in the original request.

QUERY TRANSACTION STATUS

The status of the authorization can be queried by a request sent to the Query interface endpoint. An example request is given in “XML and POST examples/Invoice/Invoice Examples XML/Optional/QUERY_TRANSACTION_REQUEST.xml”. The uniqueID in the request must be taken from the PRE_AUTH response:

XML	POST
<pre><Response version="1.0"> <Transaction> <Identification> <UniqueID>sample123</UniqueID> </Identification> </Transaction> </Request></pre>	<pre>IDENTIFICATION.UNIQUEID</pre>

Example Query responses are provided in the same directory in the files:

QUERY_TRANSACTION_RESPONSE_OK.xml – the purchase was approved

XML
<pre><Processing code="VA.PA.90.00"> <Timestamp>2026-05-18 12:57:39</Timestamp> <Result>ACK</Result> <Status code="90">NEW</Status> <Reason code="00">Successful Processing</Reason> <Return code="000.000.000">Transaction succeeded</Return> ... </Processing></pre>

QUERY_TRANSACTION_RESPONSE_NOK.xml – the purchase was rejected or the user didn't authenticate in time

XML
<pre><Processing code="VA.PA.60.95"> <Timestamp>2026-05-21 13:30:00</Timestamp> <Result>NOK</Result> <Status code="60">REJECTED_BANK</Status> <Reason code="95">Authorization Error</Reason> <Return code="800.100.170">transaction declined (transaction not permitted)</Return> ... </Processing></pre>

QUERY_TRANSACTION_RESPONSE_PENDING.xml - MFA is still ongoing

XML

```
<Processing code="VA.PA.80.00">
  <Timestamp>2026-05-21 14:04:09</Timestamp>
  <Result>ACK</Result>
  <Status code="80">WAITING</Status>
  <Reason code="00">Transaction Pending</Reason>
  <Return code="000.200.000">Transaction pending</Return>
  ...
</Processing>
```

RESULT CODES OF THE QUERY RESPONSE

Transaction	Status
ACK	Transaction successful or pending
NOK	Transaction rejected, see status code for details

STATUS CODES OF THE QUERY RESPONSE

Status Code	Status	Reason
60	REJECTED_BANK	Rejected by payolution Risk checks
80	WAITING	For MFA: second step of authentication is in progress
90 / 00	NEW / SUCCESS	Transaction successful

AUTHENTICATION TIMEOUT

If the customer does not finish the Multi-factor authentication in a given time frame (usually 20 minutes), the transaction will be rejected and the status PENDING will be changed to NOK.